

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number  
WO 2004/012993 A1

(51) International Patent Classification: B64C 27/20,  
B60V 1/04, B64D 7/06, B64C 29/00

(21) International Application Number: PCT/IL2003/000640

(22) International Filing Date: 5 August 2003 (05.08.2003)

(23) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 5 August 2002 (05.08.2002) US  
60/400,709

(71) Applicant (for all designated States except US): URBAN  
AERONAUTICS LTD. [IL/IL]; Airport City, P.O. Box  
190, 70151 Ben Gurion Airport (IL).

(72) Inventor: YOELI, Raphael [IL/IL]; 24 Dubnov St.,  
64957 Tel-Aviv (IL).

(74) Agent: SWIRSKY, Daniel J.; AlphaPatent Associates  
Ltd., P.O.B. 2345, 99544 Beit Shemesh (IL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VTOL VEHICLES

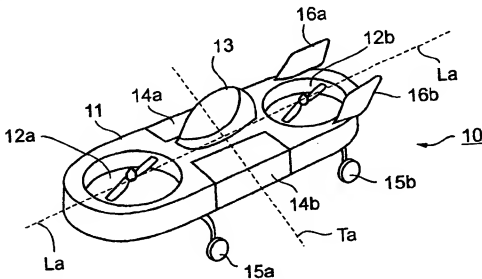

(57) Abstract: A vehicle including a fuselage (11) having a longitudinal axis (La) and a transverse axis (Ta), at least one lift-producing propeller (12a, 12b) carried by the fuselage (11) on each side of the transverse axis (Ta), a pilot's compartment (13) formed in the fuselage (11) between the lift-producing propellers (12a, 12b) and substantially aligned with one side of the fuselage (11), and a payload bay (14a, 14b) formed in the fuselage (11) between the lift-producing propellers (12a, 12b) and opposite the pilot's compartment (13). Many variations are described enabling the vehicle to be used not only as a VTOL vehicle, but also as a multi-function vehicle for performing many diverse functions including transport and ATU functions.